


ALBERTSLUND MINI POST

The fixture emits symmetrical glare-free light directed downwards. The top shade helps direct the light downwards and prevent light from being emitted upwards. The white painted reflectors result in diffused and comfortable light distribution. The reflector ring protects against direct glare.



Jens Møller-Jensen

Jens Møller-Jensen was born and raised in Copenhagen. In 1955, he finalized his exam as a medical and technical instrument engineer and in 1964, he graduated as an architect from the Royal Danish Academy of Fine Arts, Copenhagen.



Product info

Environmental Product Specification

This product is compliant with the requirements contained in the European Directives, RoHS Directive 2011/65 and 2015/863. This product is designed so that 100% of the product can be disassembled and reused.

Information

LED Upgrade kit available for upgrading Albertslund with CFL light sources produced from 2005 and up to previous LED variants. Dimming options CLO, and night time dimming (default setting: 50% power in 8 hours). All variants available with Zhaga socket for Smart City compatibility. Including CLO and night time dimming options. The driver is integrated in the fixture head. Please contact Louis Poulsen for 2700K and more info about supported Light Management Systems

Mounting

Pole dimension: Ø 60mm. Transition pieces for Ø 115mm pole can be bought as accessory parts. Installation cable: 4m, 5x1mm² (Class I) or 4m, 4x1mm² (Class II). Driver: Built into the fixture head.

Finish

Aluminium coloured with textured surface, graphite with textured surface or grey, powder coated.

Materials

Top shade: Form pressed glass fibre. Enclosure: Injection moulded clear polycarbonate. Heat sink/fixture housing: Die-cast aluminium. Console: Die-cast aluminium. Struts: Stainless steel.

Sizes and weights

width x Height x Length (mm) | 660 x 565 x 660 Max 23,3 kg

Class


Ingress protection IP66. Electric shock protection I w. ground, II w/o ground. IK10.

Light source

LED 3000K 34W
Lumen: 2915

Information

LED Upgrade kit available for upgrading Albertslund with CFL light sources produced from 2005 and up to previous LED variants. Dimming options CLO, and night time dimming (default setting: 50% power in 8 hours). All variants available with Zhaga socket for Smart City compatibility. Including CLO and night time dimming options. The driver is integrated in the fixture head. Please contact Louis Poulsen for 2700K and more info about supported Light Management Systems

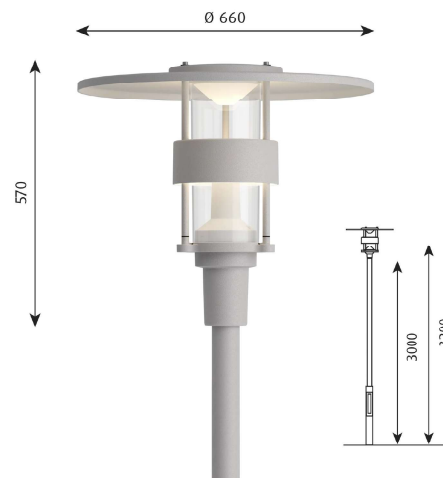

Product variants

Colour	Mounting	Light source	Lumen	Class	Shield	Lighting control
● Aluminium colour texture	Ø 60 pole	LED 3000K 34W	2915	I	120° LIGHTPROOF	2xzhaga ct
○ Colour of your choice	Ø 60 POLE	LED 4000K 34W	2990	II	120° OPAL	Dac: dali + clo
● Graphite grey texture					CLEAR	Dpc: nightdim + clo
● Grey						

Product description

The design is based on an anti-glare ring, conical reflectors and a circular top shade, which serves as the primary reflector.

Terse design

Different colour variants.

Part of a product family.

Mounting

Pole dimension: Ø 60mm.

Installation cable: 4m, 4x1.5mm² (Class I) or 4m, 4x1.5mm² (Class II).

Driver: Built into the fixture head.

LED upgrade kit available.

Light description

The fixture emits symmetrical glare-free light directed downwards. The top shade directs the light downwards and prevents light from being emitted upwards from the post top. The white painted reflectors result in diffuse and comfortable light distribution. The reflector ring protects against direct glare.

Two components of reflected light provides a high level of vertical light for people to feel safe and comfortable. Conical optical solution ensures a good balance between luminance and downward directed light.

BUG U2 available (US).

The fixture design is identifiable when the light is on as well as off. LED technology with more options of standard CCTs. Electronic dimmable driver.

Smart city compatible solution available.

Design

Jens Møller-Jensen

Material

Top shade: High pressure moulded fiber glass, lower surfaces with high-reflectance white finish.

Enclosure: Injection moulded clear polycarbonate, UV stabilized.

Console & heat-sink. Die-cast aluminium.

Struts: Stainless steel. Inside reflectors of white polycarbonate.

Optical cone and diffuser polycarbonate.

Driver inside the fixture head.

Weight

Min: 21.2 kg Max: 23.3 kg

Other functions


LED retro-fit solution available.

Finish


Aluminium colour texture, Graphite grey texture, Grey

Light distribution diagrams


Cartesian

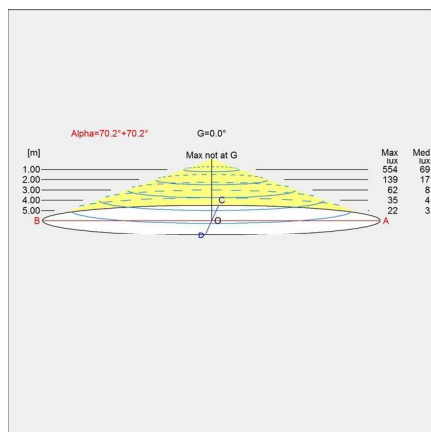

Isolux

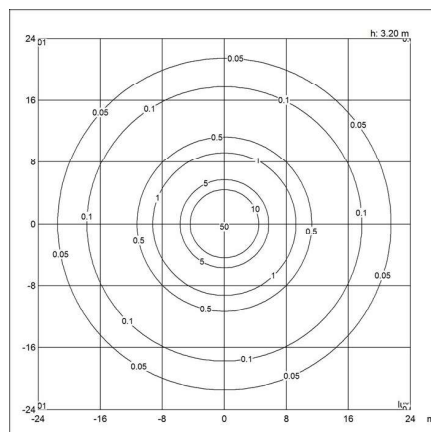

Polar

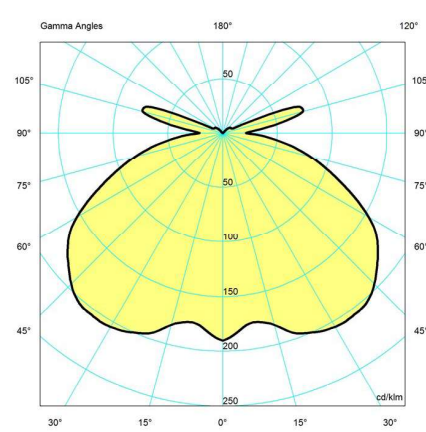

Spare parts & accessories

Product	Variant number
Albertslund Mini polycarbonat diffuser	5747291083
Albertslund Mini polycarbonat diffuser (V2)	5747291096
Albertslund Mini shade Grey	5747291106
Albertslund Mini distance tube	5747811968
Albertslund MINI innerstrut	5747816633
Albertslund Mini anti-glare shade Grey	5747816646
Albertslund Mini elass.150W A65 ora.sock	5747291135
Albertslund Mini transition piece for pole Ø115/Ø60 Grey	5747297359
Albertslund Mini transition piece for pole Ø115/Ø60 Graphite Grey	5747297362
Albertslund Mini transition piece for pole Ø115/Ø60 Aluminium Colour Texture	5747297375
Albertslund Mini cap nut	5747811036
Albertslund Mini reflector with Ø18 hole	5747811926
Albertslund Mini lock/support strut	5747811955
Albertslund Mini E27 socket	5749320907
Albertslund Mini E27 socket	5749321346